

LIFTS **ALL** AIRPORT HANDLING SOLUTIONS



**LIFTING BAGGAGE
WITH  basic**

100% LIFT RATE - IT'S BASIC!

As soon as Basic's vacuum head lands on the bag, it is automatically stuck and ready to lift, quick and easy! Thanks to endless rotation of the vacuum head the bag is easily placed however one wants. By a distinct push with the thumb on the release button the gripper releases the bag in the air. Release in the air function is a purchased option.

Maximized Freedom

A complementing hook is always enclosed, easily flipped down if needed. Basic can therefore lift 100% of the bags - soft as well as hard!

Quick Learning - Quick Lifting

The control is very instinctive and easy. The handle is specially designed to suit both left and right handed users, no matter their sizes of hands. No modifications are needed to switch from the right hand to the left hand.

Safety First

Basic is a safe lifting tool. It never allows lifting if the vacuum level is below 40% and will not release the bag until the user pushes the release button.

Big Savings in Energy Costs

Basic is pneumatically driven and only requires a few per cent of the energy that traditional vacuum lifters need. This gives a positive effect on economy and environment, and also makes the lifter silent.



Basic lifts hard bags...

GENERAL DATA


- Max load: 50 kg
- Lift height: 1,5 m (std)
- Rotation of vacuum head: Endless
- Handle: One hand control
- Noise level - soft bags: 55 dB
- Noise level - hard bags: 0 dB

ENERGY DATA

- Media: Compressed air (6-7 bar)
- Energy consumption: Contact us for an energy savings calculation based on your conditions, free of charge!



...as well as soft bags.

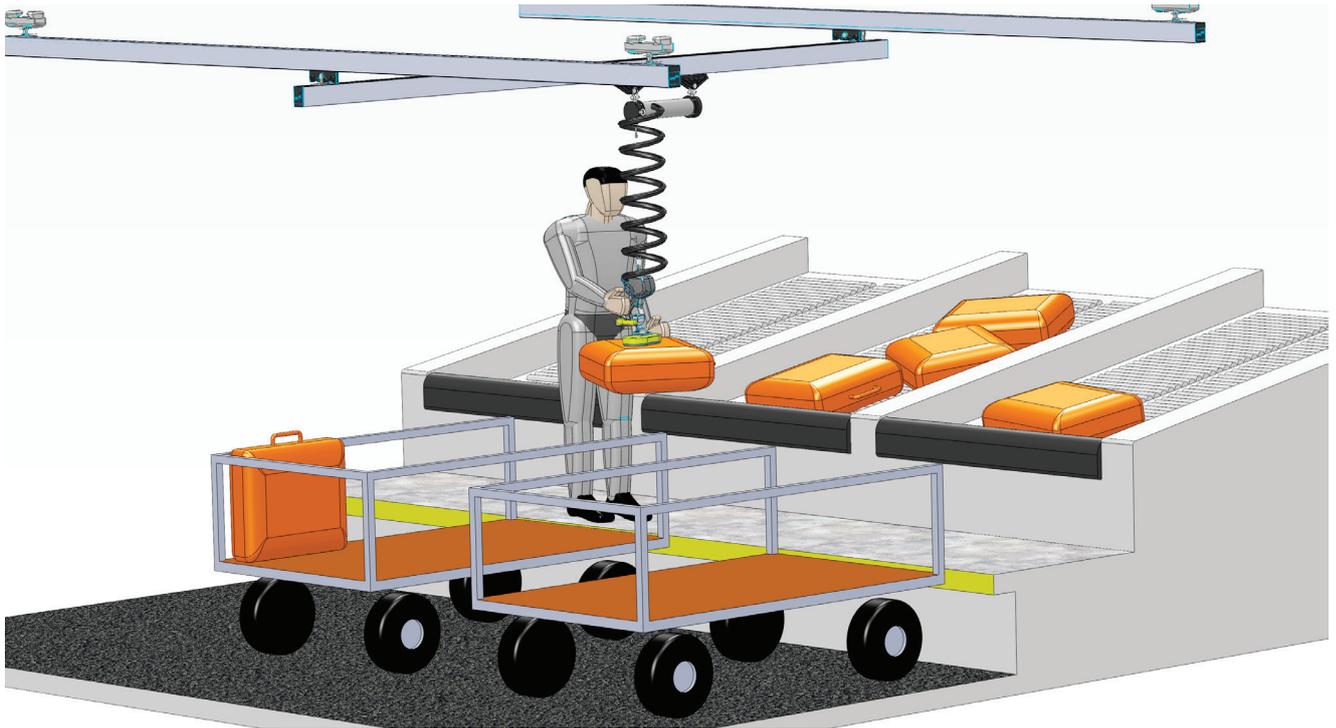

Loading baggage from chutes to carts.

APPLICATIONS


Basic is multifaceted and can lift just about anything thanks to the hook that always included. The quick connection allows the user to adjust his Basic in just a few seconds to suit different objects sizes and materials, such as sacks or carton boxes. We'll help you to find the application that suits you best!



The baggage frame can also be used for sacks.



For other types of cargo, such as carton boxes.



Baggage and Sack frame
 Length: 250 mm.
 Width: 135 mm.
 Max load: 50 kg



Single
 Cup diameter: 150 mm.
 Max load: 24 kg



I-frame
 Cup diameter: 110 mm.
 Distance between cups: 50 mm.
 Max load: 24 kg



H-frame
 Cup diameter: 75 mm.
 Distance between cups: 65 mm.
 Max load: 24 kg

WHAT DO YOU WANT TO LIFT?

We provide complete solutions:

- Allround lift - Basic
- Compressed Air cylinder - Bal-Trol
- CLS/CUS - for loading and unloading baggage
- Overhead Rail System
- FlexiCrane
- Compressor
- Installation
- Introduction & Training

LIFTS **ALL** | AIRPORT
HANDLING
SOLUTIONS

Passadvägen 10
SE-177 70 Järfälla
Sweden

Tel: +46 8-594 76 988
Fax: +46 8-626 90 15
E-mail: lifting@liftsall.se
Website: www.airporthandlingsolutions.com